


Prehľad

- Optický adaptér SC Simplex je spojovacím prvkom a slúži k prepojeniu optického pigtailu a adaptéru

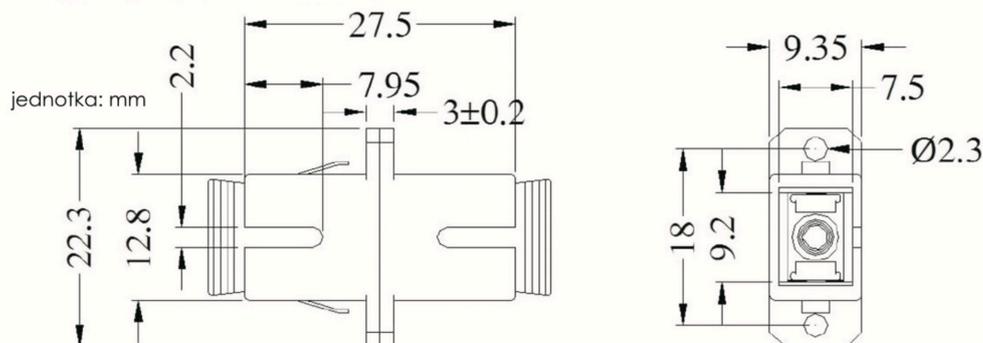

Parameters	Value
Typical Insertion Loss	≤0.1 dB
Max Insertion Loss	≤0.2 dB
Durability(500 Mating Times)	Δ I. L. ≤0.2 dB
Operating Temperature	-40°C ~ +75°C
Storage Temperature	-40°C ~ +85°C